




Portable Power

12/150 | Portable Air Compressors



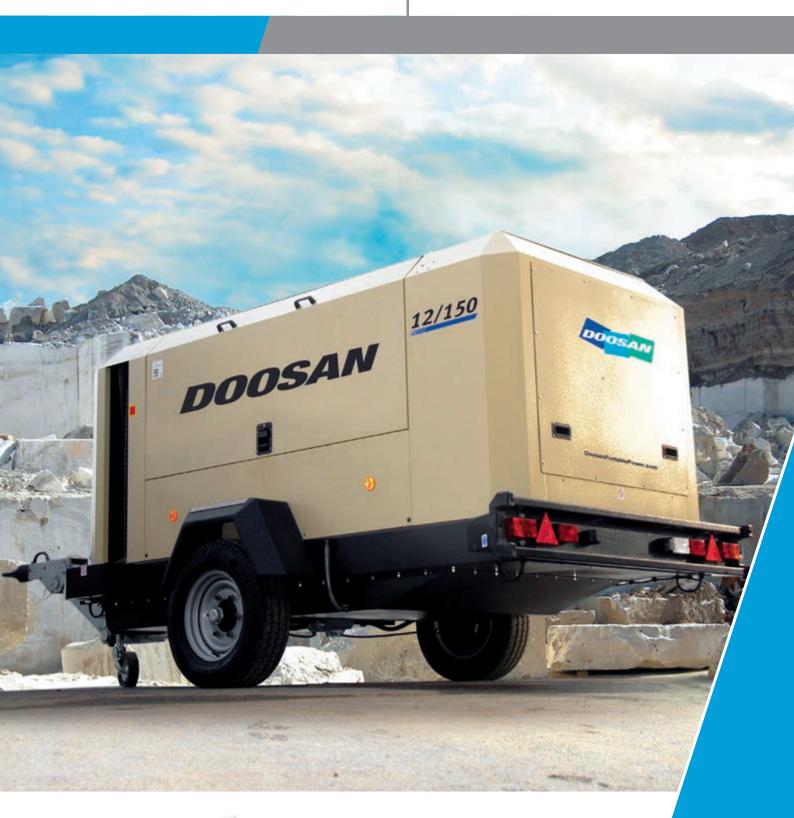

. •
Ħ.
Je
_
·≡
ಕ
ĕ
ō
ā
2
ē
ĸ
믎
Ĕ
Ţ
ഉ
Ħ
Š
2
sho
)a
Ξ
ts
ಕ್ಷ
ಹ
ğ
ē
ž
Q
ď.
əe
gap
⊏
8
_
g
õ
8
Ð
0
lres (
₹
ŧ
ă
ė.
.0
ಕ
Ħ
ŏ
₽
₹
ē
ng
В
8
ŏ
Ħ
S
÷
₹
S
3.6
٥
Б
·S
8
ō
Ĕ
S
Ξ
atic
g
≝
Ď.
bec
Ϋ́
\sim
ר /
~
550

Compressor	12/150
GENERAL INFORMATION	
Free Air Delivery - m³/min (cfm)	14.9 (526)
Rated Operating Pressure - bar (psi)	12 (175)
ENGINE	
Make / Model	Cummins / QSB6.7
No. of cylinders	6
Full load speed - rpm	2000
Power - kW (hp)	164 (220)
Cooling	Water
Fuel tank capacity - litres	310
DIMENSIONS (WITH RUNNING GEAR)	
Length (fixed towbar) - mm	4847
Length min/max (adjustable towbar) - mm	4995/5155
Width - mm	2130
Height - mm	2022
Weight (net) fixed/adj - kg	2566/2618
Weight (working) fixed/adj - kg	2816/2868
Weight max. – kg	3000 (6600)
DIMENSIONS (ON SHIPPING SUPPORT)	
Length - mm	3350
Width - mm	1590
Height - mm	1700
Weight (net) - kg	2233
Weight (working) - kg	2483
SOUND LEVEL	
2000/14/EC (2006) - Lwa	99
AIR OUTLETS BSPT	
	1 x 2"
	1 x 11⁄4″
	2 x 3/4"

Simply the greatest


The 12/150 compressor model is the company's largest single axle portable compressor. Incorporating the 'built-to-be-used' design – common to all DIPP compressors – the 12/150 provides the highest levels of durability, productivity and serviceability.

The 12/150 has a free air delivery of 14.9 m³/minute at an output pressure of 12 bar and is designed for applications in plant hire, construction, quarrying and general industry.

In addition, the 12/150 offers a bunded base as standard for environmental protection and a well-positioned fuel tank features a large size filler to limit the risk of fuel spillage.



The wide opening doors and standard central drains contribute to the excellent serviceability of the 12/150, with all areas carefully designed for ease of inspection, maintenance and repair.



2 Wide opening doors, perfect service access

3 Well-positioned fuel tank with large filler size limiting spillage risk

4 Removable back panel for easy access to coolers

5 Central drains and 4 air outlets standard

6 Bunded base standard













Available options (not exhaustive): roadlights, variable height running gear, spark arrestor, overspeed valve, aftercooler and water separator, IQ system, wheel chocks, dual pressure switch, low fuel beacon.

www.doosanportablepower.com





Portable Power